



## FIRST TIME INSTALLATION

### FIRST TIME INSTALLATION


When turning on the CTOUCH display for the first time, the below shown installation menu pages will appear on the screen.

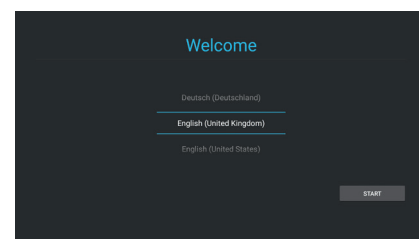

Select the desired menu language. Press **START** to go to the next page.

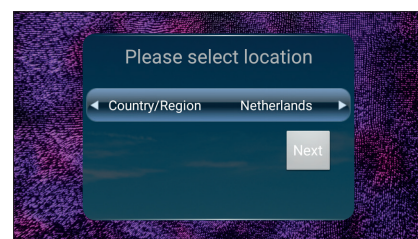

Select your location and press **NEXT** to go to the next page.

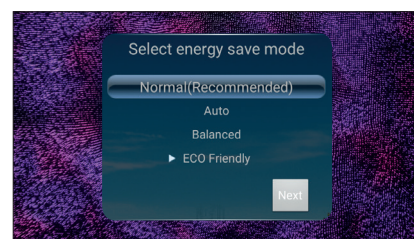

Select your required Energy Saving Mode and press **NEXT** to finish the installation.

### WIRED

Plug the LAN-cable into the LAN-port on the bottom or side of the CTOUCH display, to connect to the internet.

### OTA UPDATE

When you connect your display to the internet, a notification will appear when a new firmware update is available.

Depending on the model, it may happen that two notifications will appear. One of the notifications is for the firmware update of the display. The other notification will be for the update of the slide in module. Please make sure you update both, in order to update the whole system.


**Note:** A LAN-connection is required to update the display via OTA. If you do not have a LAN-cable available, you can update the display by using a USB device. Please contact your dealer for the USB update method firmware file.

### OTHER QUESTIONS

Press the CTOUCH home button and then press on the 'i'-icon to open the onboard manual.

Or visit [support.ctouch.eu](http://support.ctouch.eu).

## REMOTE CONTROL

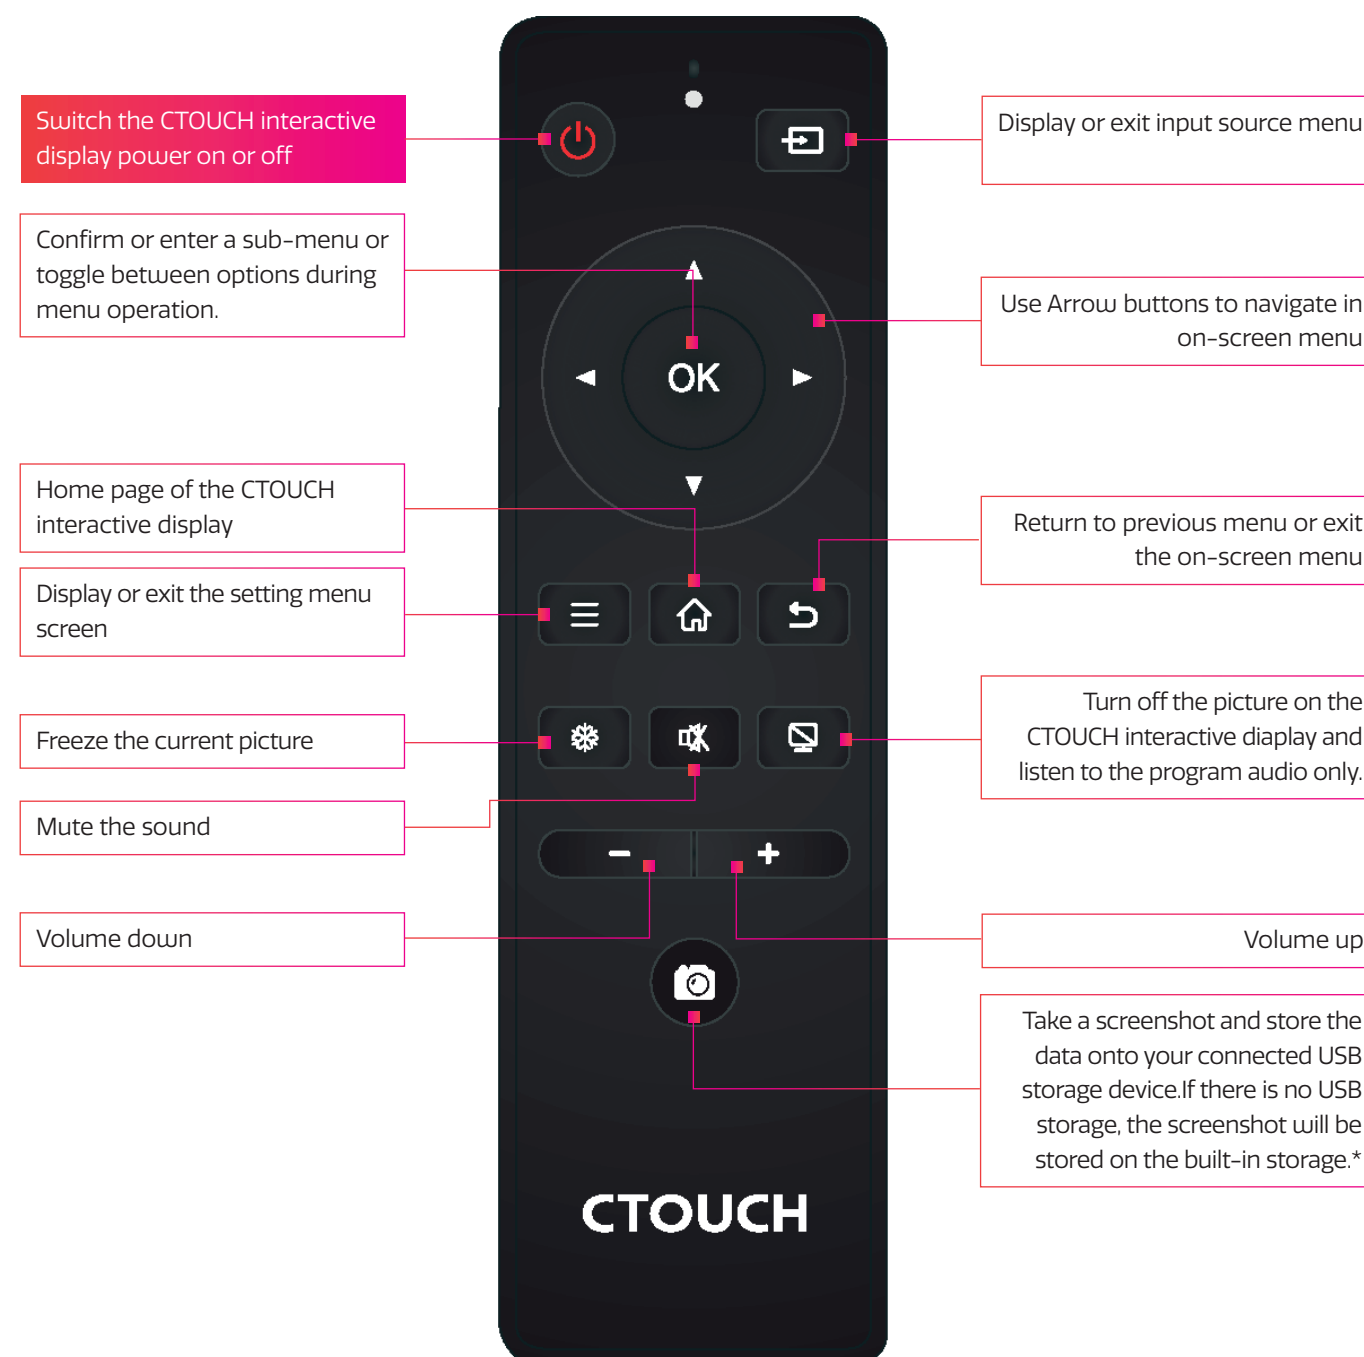

\* The function differs depending on the model you have.


# HEY YOU, START ME UP!

Share, inspire, have fun!  
With CTOUCH by your side.

**CTOUCH**<sup>®</sup>  
The power to engage


**CTOUCH**<sup>®</sup>  
The power to engage

## CONTROL PANEL

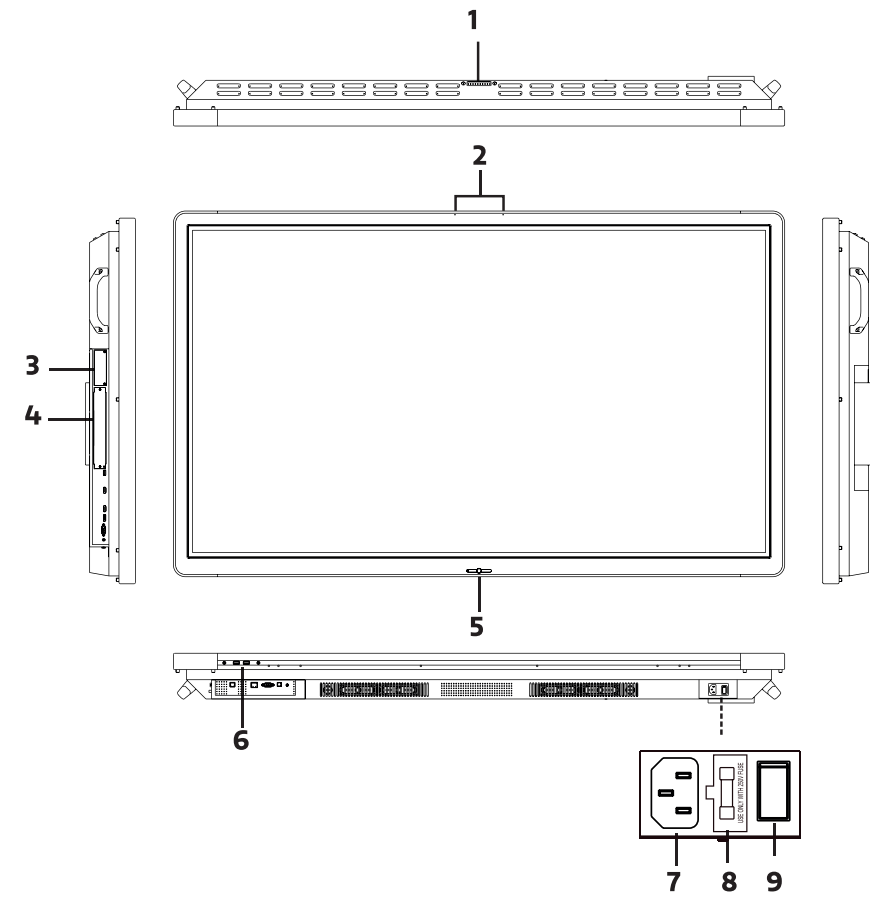

NR.	DESCRIPTION	DESCRIPTION
1	USB(2.0)(for camera)	This port is for connecting a camera. <b>Notes:</b> 1. Please open the dust cover before being used. 2. It can perfectly support camera's up to 720p.
2	Microphone	Voice input.
3	Slide in module slot	For optional module.
4	OPS module slot	Insert an OPS module (Optional).
5	Power LED	Red: In standby mode. Blue: In power on mode.
CTOUCH Button	Remote control sensor	To control the display with the remote, aim it to this sensor.
	Power	Press to switch the CTOUCH interactive display on or off. <b>Note:</b> When the CTOUCH interactive display is turned on, press the button in middle to show the Float Bar. Press the button for about 2 seconds and the screen will go into stand-by mode.
6	USB	Connect USB devices to these ports.
7	AC IN	Plug the AC cord into this jack and into a power outlet. (AC 100-240V 50/60Hz)
8	Fuse	10A 250V
9	Power Switch	Push ( I ) to turn on the power, push ( O ) to cut off the power. <b>Note:</b> Don't cover the power switch.

## CONNECTION PANEL

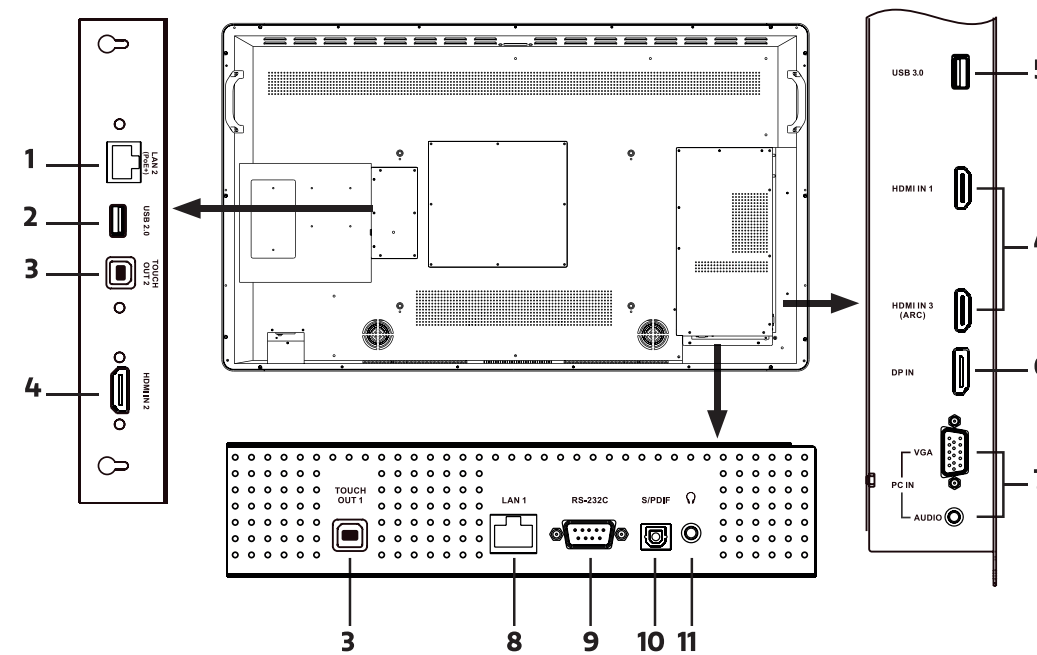

NR.	DESCRIPTION	DESCRIPTION
1	LAN 2(PoE+)	LAN port for external devices (placed on the small VESA mount).
2	USB 2.0	Connect USB devices to this port.
3	TOUCH OUT 1/2	Output for external devices connected to HDMIx, DP or VGA ports which support touch systems.
4	HDMI1/2/3 INPUT	Connect an HDMI device to this HDMI port. HDMI3(ARC): Connect an ARC-enabled device to this HDMI port.
5	USB 3.0	Connect USB devices to this port. <b>Note:</b> The function differs depending on the model you have.
6	DP(DisplayPort) INPUT	Connect a DP device to this DP port.
7	VGA INPUT	Connect a VGA device to this VGA port.
8	LAN 1	Connect a LAN cable to this LAN port.
9	RS-232C	For remote control.
10	S/PDIF digital audio output	Connect a digital sound system to this S/PDIF jack.
11	Headphones	Connect headphones to this jack. <b>Note:</b> The current selected source is audible and internal speakers will be disabled.

## POWER ON / OFF

### TURNING THE CTOUCH INTERACTIVE DISPLAY ON OR OFF

1. Plug the power cord into an AC power outlet.
2. Switch the Power Switch on the CTOUCH interactive display on.
3. The display is in standby mode now. Wait a moment until the power indicator lights up, then press button on the remote or the CTOUCH button on the display, to turn the CTOUCH interactive display on.

**Note:** The CTOUCH interactive display needs some time to shut off correctly before it can be switched on again. By interrupting this process the next start up can take longer.

4. Press button on the remote or the CTOUCH button on the display again, to turn the CTOUCH interactive display in standby mode.
5. Switch the Power Switch off to cut off the power completely.

**Note:** If the CTOUCH display is on the VGA source and does not get any signal, it will go into stand-by mode after two minutes. When the CTOUCH display is on others sources and does not get any signal, it will go into stand-by mode after 10 minutes.

### CONNECTIONS

- Make sure both the external device as well as the CTOUCH display are turned off, when connecting the external device to the CTOUCH display.
- Check the plugs at the ends of the cables to make sure that they are the correct type, before plugging them into the jacks of the CTOUCH interactive display.

**Note:** For an overview of the possible external connections, please refer to the CTOUCH user manual on your display. Or visit [support.ctouch.eu](http://support.ctouch.eu)