

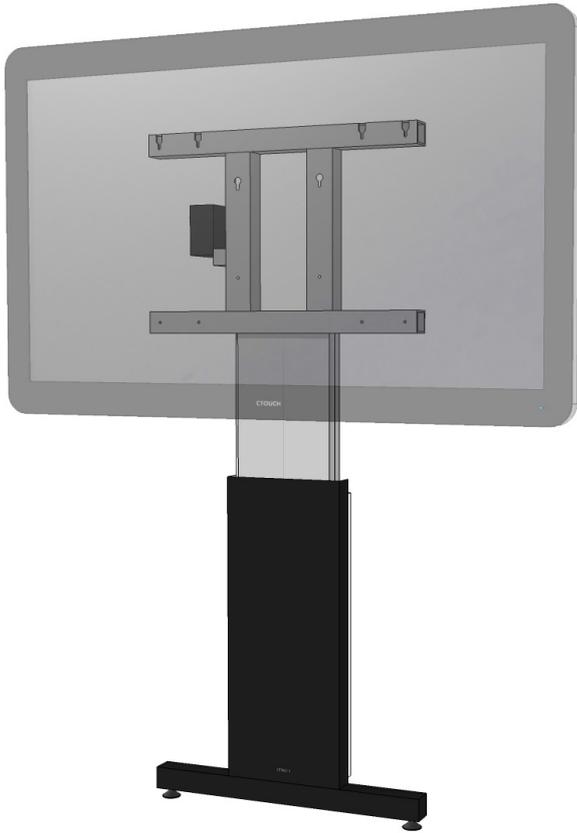
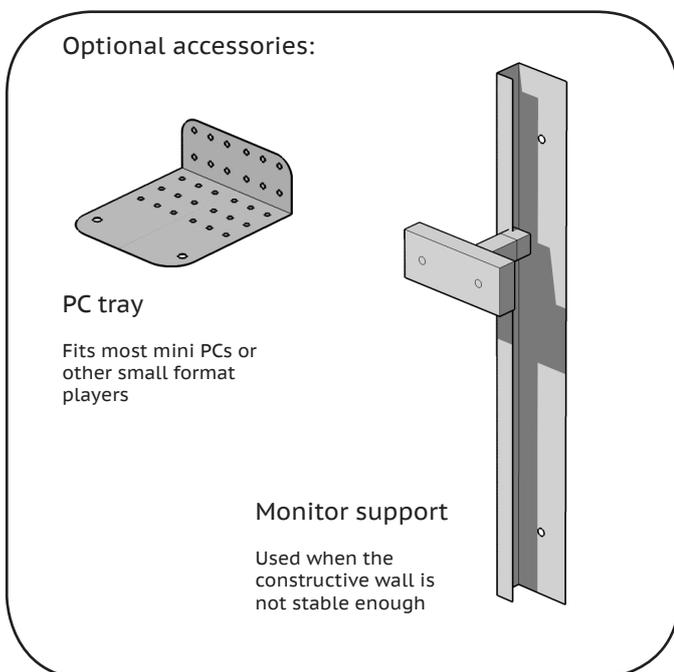


# CTOUCH Wallom WL Installation manual

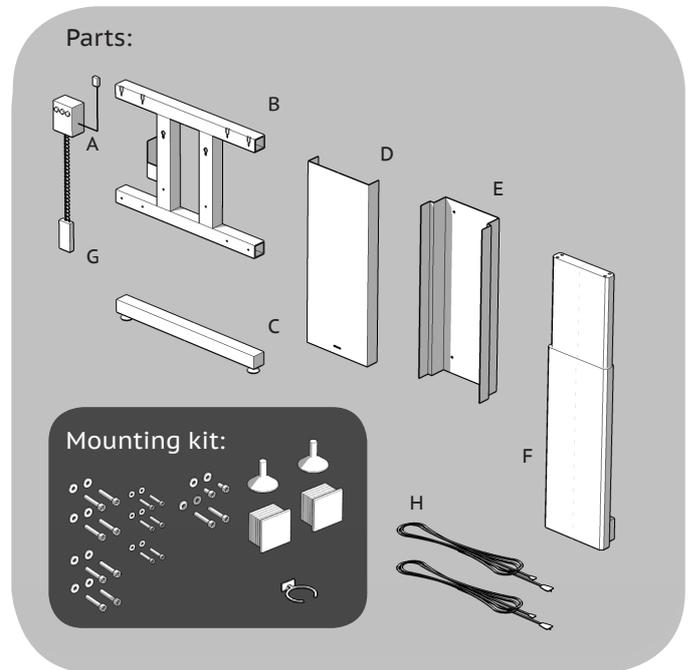

# CTOUCH

Smart innovation!

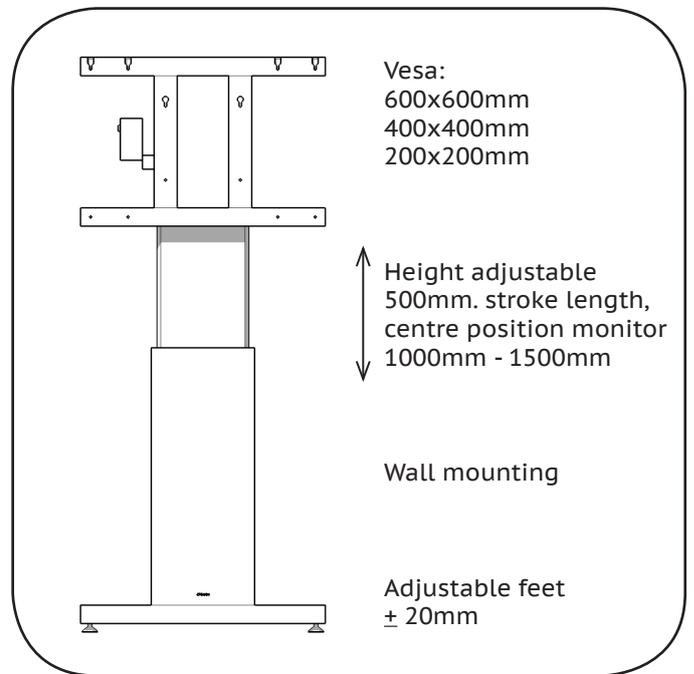

### Parts:

- A - Power supply
- B - Interface
- C - Floorstand
- D - Frontplate
- E - Wallmounting
- F - Electric lift
- G - Remote
- H - Powercable EU / UK


### Mounting kit:

- 2x M8x16
- 2x M8x65
- 4x M6x8
- 10x M8 ring
- 4 x M6 ring
- 8x M8x70
- 1x Cable holder
- 2x End caps
- 2x Adjustable feet

Changes or modifications void any warranty and exclude any liability. This user manual includes detailed instructions for your product. Figures and illustrations in this user manual are provided for reference only and may differ from actual equipment appearance. Equipment design and specifications may be changed without notice.

1


Start by putting the adjustable feet and end caps on the floorplate (C). Then fix the floorplate (C) to the bottom of the lift (F).

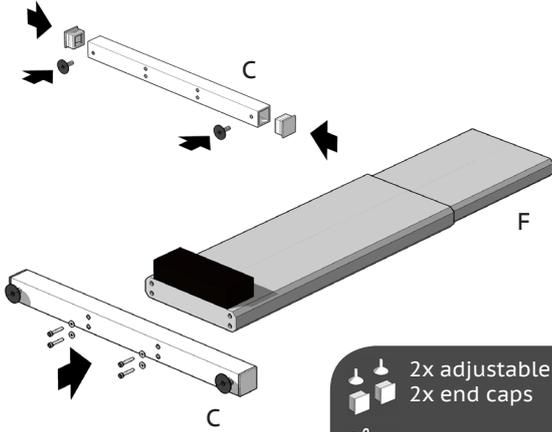

- 2x adjustable feet
- 2x end caps
- 4 x M8x70
- 4 x M8 ring

2


Connect the interface (B) on the top of the lift (F). Test the lift by connecting the power supply (A) and put the lift in the maximum position.

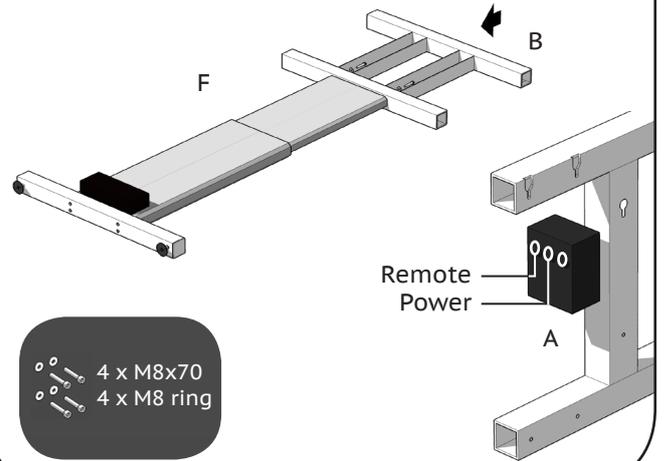

- 4 x M8x70
- 4 x M8 ring

3

Drill a minimum of four holes in the constructive wall and secure the wallmount (E) using mounting material.

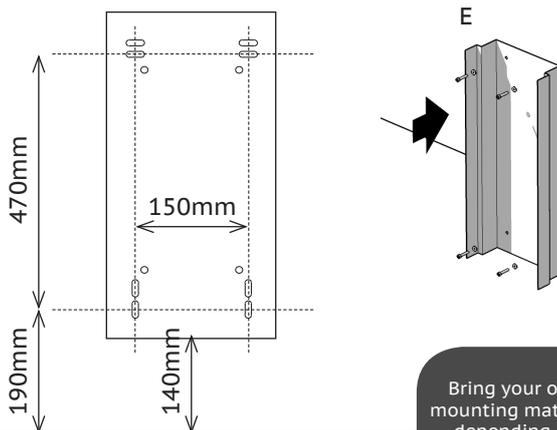


Optional accessory: Monitor support

Bring your own mounting material, depending on wall type.

4


Place the lift (F) in the Wallmounting (E) and lock with the frontcover (D). Fasten screws after locking.

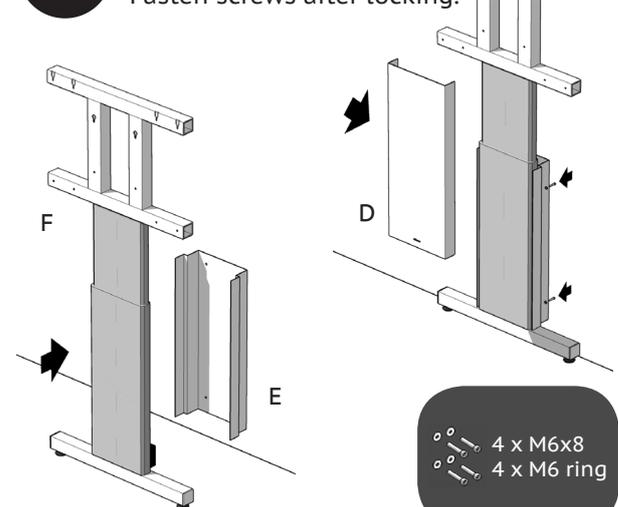

- 4 x M6x8
- 4 x M6 ring


5

Place Cable Holder on the back of the interface (B) and install all cables.

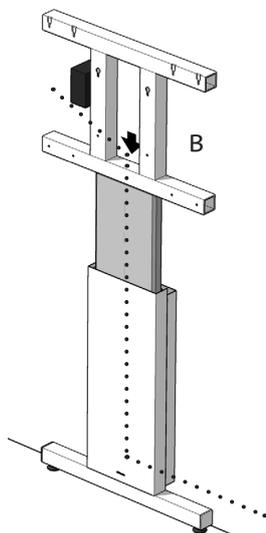

6

Place the top two screws in back of the monitor. (monitor supplied seperately) Then place the monitor on the interface (B) and fix the top screws. Fasten the lower screws and the lift is ready to use.

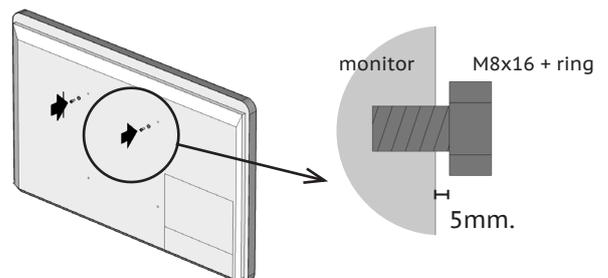

- 2 x M8x16
- 2 x M8x65
- 4 x M8ring